

ReSound Ziga

Product information

ZG20-P MC



Product Description

ReSound Ziga ZG20-P is part of a complete family of advanced hearing instruments that is tailored to compensate for all types of mild to severe hearing loss. For those seeking the ultimate in discretion we have introduced the advantages of ReSound Ziga in the cosmetic mini-canal solution.

The great sound package is based on the ultra fast Warp™ wide dynamic range compression system providing a comfortable sound experience in all daily environments.

Key features

- Power MiniCanal
- 9-band WARP™ Sound Processing (6 gain handles)
- NoiseTracker™ Noise Reduction
- Impulse Noise Smoother
- Dual Stabilizer™ II DFS Feedback Cancellation
- DataLogging
- SmartStart™
- Acoustic Indicator for Programme Selection
- Acoustic Indicator for Volume Control
- Low Battery Warning Indicator
- 2 Flexible Environmental Programmes plus acoustic telephone
- Low Battery Consumption Chip Technology


Standard Configuration

- Size 10A battery
- Push button (Optional)
- Programmable Volume Control (Optional)
- Available in 3 colours

Fitting requirements

- Aventa fitting software (version 2.5 or higher)
- CS63 FlexStrip Cable (3-pin)
- Speedlink™, HI-PRO or NOAKlink interface (Speedlink recommended)

Fitting Range

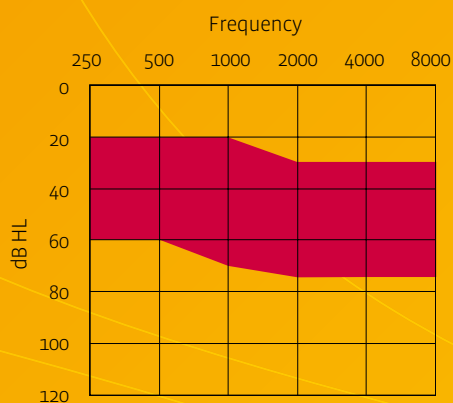

ZG20-P MC






Technical Specifications

IEC 60118-0
IEC 711
Ear Simulator

IEC 60118-7
2cc Coupler

Reference Test Gain (60 dB SPL Input)	1600 Hz / HFA	31 dB	31 dB
Full-On Gain (50 dB SPL Input)	Max	49 dB	39 dB
	1600 Hz / HFA	41 dB	33 dB
Maximum Output (90 dB SPL Input)	Max	123 dB SPL	113 dB SPL
	1600 Hz / HFA	118 dB SPL	110 dB SPL
Total Harmonic Distortion	800 Hz	1.0 %	1.2 %
	1600 Hz	0.9 %	1.6 %
Equivalent Input Noise, w/o Noise reduction		25 dB SPL	25 dB SPL
1/3 Octave E.I.N. at 1600 Hz, w/o Noise reduction		11 dB SPL	
Frequency Range (DIN 45605)		100-5990 Hz	100-5900 Hz
Current Drain		0.88 m A	0.94 mA
Typical Battery Life Time (Battery type 10A)		102 hrs	96 hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

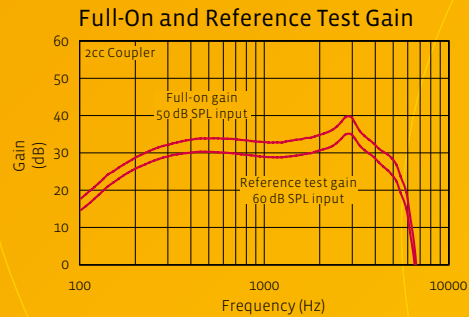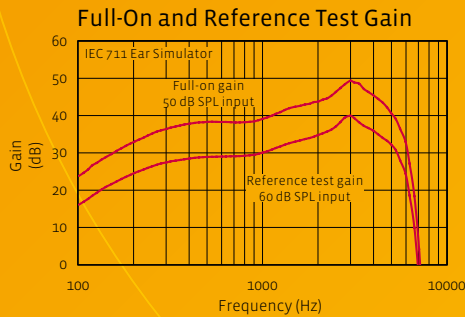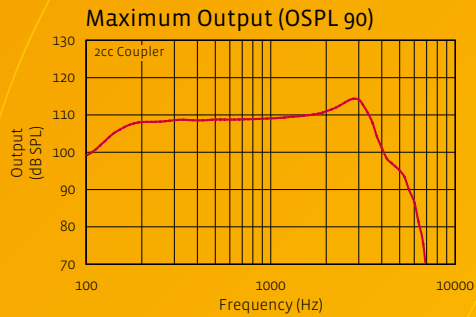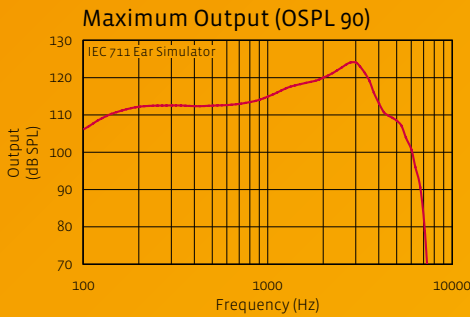

Full/On Gain Parameter Settings*

	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	6 kHz
G[80]	29	29	29	29	29	29
G[50]	39	39	39	39	39	39

Reference Test Gain Parameter Settings for 118-0*

	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	6 kHz
G[80]	22	22	22	22	22	22
G[50]	32	32	32	32	32	32

Reference Test Gain Parameter Settings for ANSI and 118-7*

	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	6 kHz
G[80]	29	29	29	29	29	29
G[50]	39	39	39	39	39	39

*Settings in accordance with Aventa fitting software